



Setting of Anchorfix „Solo“

1. Setting of Anchorfix for designated slab thickness



Set lever of toggle clamp in horizontal position

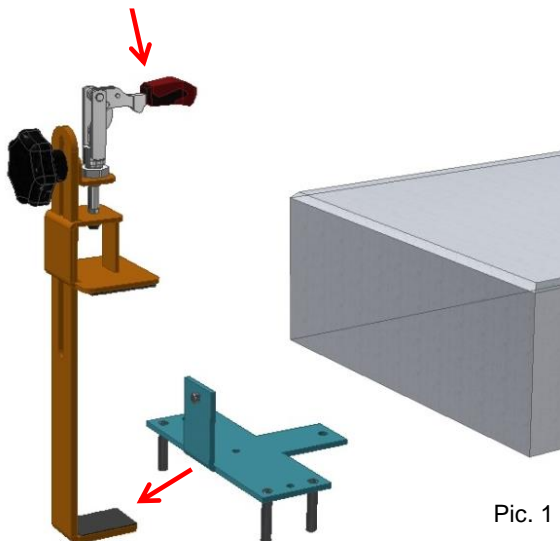


Place anchor on retaining tab.

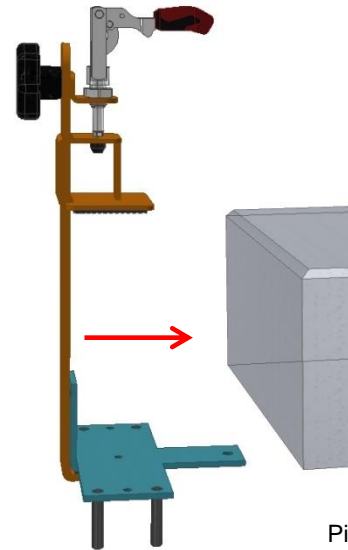

Push Anchorfix „Solo“ under designated slab.

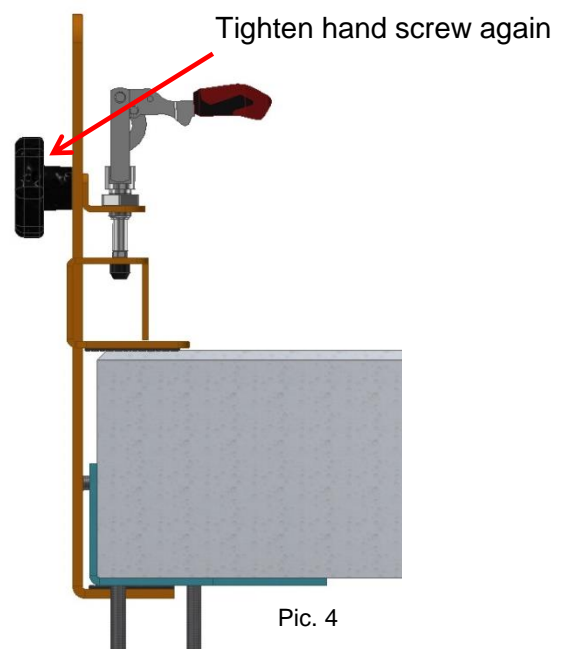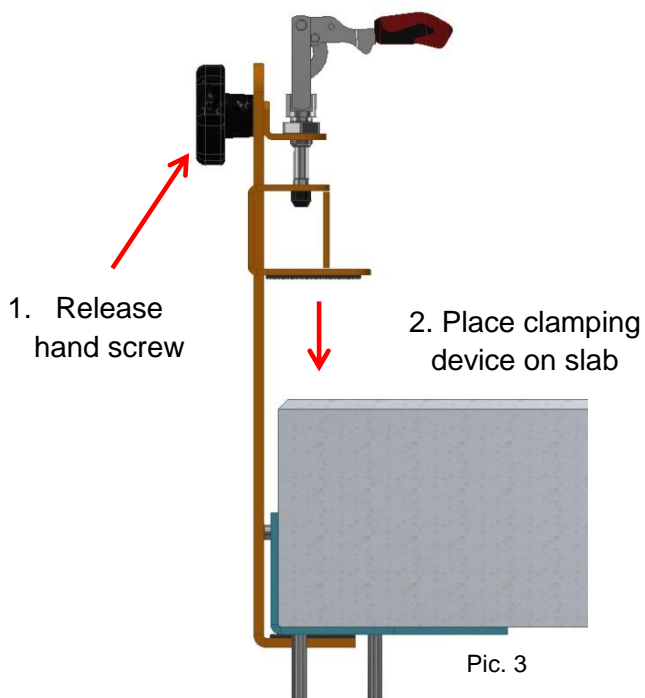


2. Application of Optimas Ankerfix „Solo“

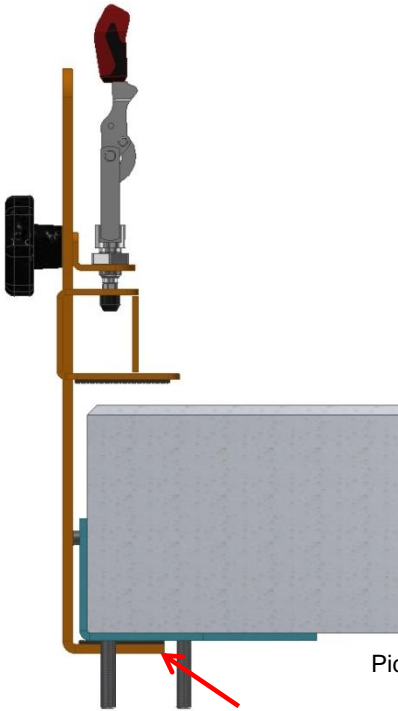

Pic. 5

Place anchor on retaining
tab of clamping device

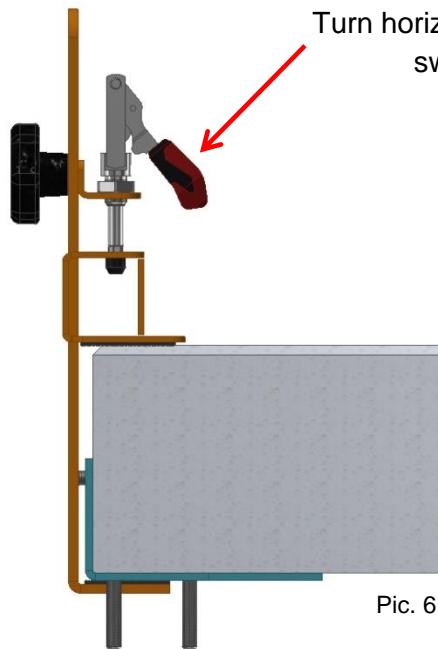

Pic. 6